More information

For more information, you can access our website www.digi-belgium.be/en/userguide

Customer Care

You can contact our Customer Care Department via our website or via phone: 0800 41 041

Environmental recycling

Please do not throw away the WiFi router with household waste. Always comply with the applicable regulations.

Violators are subject to the sanctions and measures established by law.

The cardboard box, the plastic contained in the packaging and the parts that make up the device can be recycled in accordance with the recycling regulations in force in Belgium.

X

EC Declaration of Conformity


Hereby, ZTE declares that the product ZTE H3600P is in compliance with the requirements of Directive 2014/53/EU.





DIG

Make a good call.

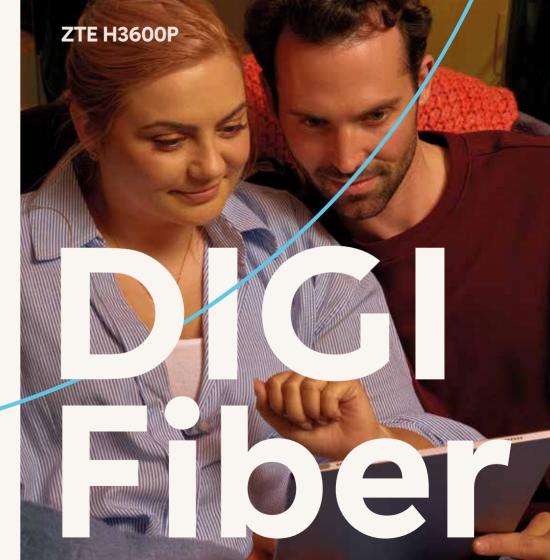

How to connect your DIGI **Internet Box to** the internet, easily and quickly?

Just follow these 3 steps.

Step 1. Installation and connection

Connect the power supply 3 of the WiFi router. 🕦

Connect one end of the Ethernet cable 2 to the "WAN" port of the router and the other end to the Ethernet (LAN) port of the ONT

DIGI

The ONT, its power supply, and the optical Fiber cable are not included in this box.

If you have contracted our landline service and wish to use a telephone, connect it to the Phonel connector of the WiFi router

Step 3. Get connected to the internet

You can connect in two different ways:

1. Connecting via wireless network

installed or it is integrated in your computer.

2. Connection via Ethernet cable



Reset to factory defaults

Step 2. Powering up the router

Indicator

Boardband Internet

2.4G

5G

WPS

USB PHONEI PHONE2 1

Power \bigcirc


USB

Plug the WiFi router. Wait a few minutes until the indicator becomes green.

The routers supplied by DIGI are optimized to connect to the internet without the need for installation or configuration.

.

Contents of the box

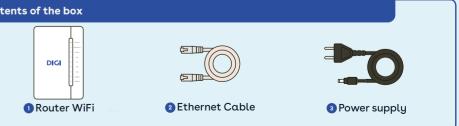



- You can use the wireless WiFi connection as long as your device has a wireless adapter
- The network and password are located on the back of the WiFi router.

Connect an Ethernet cable 2 to the computer's Ethernet input and to one of the router's connectors: LANI or LAN2. Turn on the computer and the LAN indicator light will turn green after a few seconds. This means that the connection is successful.

Please note that the wifi connection speed is lower than the speed provided by the Ethernet cable and depends, among other factors, on the distance you are from the router and the connection speed of your device.

Press the Reset button (Top button in the back) of the WiFi router for at least 10 seconds and then release it. After 30 seconds it will return to factory settings.